

ELECTRIC INSECTICIDES



TECHNICAL CHARACTERISTICS	RT-15	RT-15/2	RT-15/6	RT-15/7
DESCRIPTION	Electric insecticide		Electric insecticide with mirror	
OPERATION VOLTAGE	220-240V AC/50-60Hz			
MAXIMUM POWER CONSUMPTION	270VA	150VA	270VA	
FLUORESCENT LAMP	3x36W BL	2x36W BL	3x36W BL	
GRID VOLTAGE	3.5kV			
DEGREES OF COVER PROTECTION	IP 20			
PRODUCED IN ACCORDANCE WITH	EN 60335-1, EN 60335-2-59			
OPERATION TEMPERATURE RANGE	0 to 60 °C			
RELATIVE HUMIDITY	Up to 95%			
CONSTRUCTION MATERIALS	Bayblend FR3010, electrostatic painted aluminum			
EXTERNAL DIMENSIONS	1250 x 140 x 480 mm (L x W x H)			
TYPICAL WEIGHT	13.6kgr.	12.9kgr.	13kgr.	13.7kgr.
GUARANTEE	2 years (1 year for the lamps)			

Thank you for your trust in our products
Olympia Electronics - European manufacturer

IN GENERAL

The device was created to exterminate all disturbing insects. The special fluorescent tubes (Black Light) attract insects from a long distance. For this reason it could be used in every place that many insects exist. They are attracted and pass through the interior metal net, they are exterminated by high voltage.

There is an exterior net in order to protect birds, animals or human beings that are close enough.

Without using any chemical material it offers a complete protection against many insects like mosquitos, flies, tiny gnats etc. There is a special drawer at the bottom side of the device where all dead insects are collected. To remove the drawer unscrew the retaining screw.

WARNING!!!

Before removing the drawer follow carefully the below steps.

a. Remove the plug of the mains.

b. Unscrew the retaining screw of the drawer.

c. Remove the special drawer, clean the drawer and re-install it. Then screw again the retaining screw and reconnect the device on the mains.

In case of changing the lamps or the starter, follow carefully the below steps.

a. Remove the plug of the mains.

b. Unfasten the retaining screws and remove the protective exterior net.

c. Replace the tube or the starter which

is worn.

d. Reinstall the protective exterior net and fasten the removed screws.

e. Finish reconnecting the device on the mains and it is ready to operate.

ATTENTION!!! When the device is operating the protective exterior net must be installed.

Installation

Just plug the apparatus to the mains and it is ready for operation.

It is placed in a clear and visible place so as to attract insects easily.

It includes two hooks on top side for ceiling-mounting installation using a chain. The RT15 and RT-15/2 are suitable for hospitals, army camps, factories, etc.


The models RT-15/6 and RT-15/7 are special models with a mirror for wall-mounting installation. The connection is the same as previously. The installation is as follows.

First remove the screws 1A and 1B (Figure 1) which are found at the upper side-wise and replace them with the plastic holders. Afterwards install the apparatus on the wall. Finally place the plastic holders at point 2A and 2B (Figure 1) and fix it on the wall.

Description

1. Hole (for wall-mounted installation).
2. Hole (for wall-mounted installation).
3. Special drawer.
4. Installation point (for normal installation with chain).
5. Fuse holder.
6. Plug.
7. Protection grid.

Figure 1

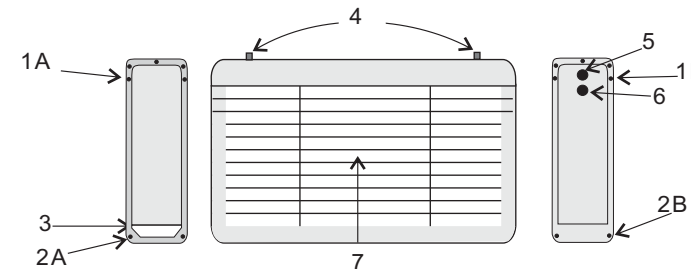

WARNING!!!

- The device is suitable for internal installation.
- The device must be kept away from children.
- The device must be not installed in areas with combustible gases or explosive dust.
- The device is not suitable for use in Sheds, cottages, stables and likewise places.
- If the device's cable is worn or damaged it must be replaced from OLYMPIA ELECTRONICS SERVICE department.

WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid. Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of deflection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini
P.C. 60300 P.O. Box 06 Eginio Pierias Greece
www.olympia-electronics.com
info@olympia-electronics.gr

ELECTRIC INSECTICIDES



TECHNICAL CHARACTERISTICS	RT-15	RT-15/2	RT-15/6	RT-15/7
DESCRIPTION	Electric insecticide		Electric insecticide with mirror	
OPERATION VOLTAGE	220-240V AC/50-60Hz			
MAXIMUM POWER CONSUMPTION	270VA	150VA	270VA	
FLUORESCENT LAMP	3x36W BL	2x36W BL	3x36W BL	
GRID VOLTAGE	3.5kV			
DEGREES OF COVER PROTECTION	IP 20			
PRODUCED IN ACCORDANCE WITH	EN 60335-1, EN 60335-2-59			
OPERATION TEMPERATURE RANGE	0 to 60 °C			
RELATIVE HUMIDITY	Up to 95%			
CONSTRUCTION MATERIALS	Bayblend FR3010, electrostatic painted aluminum			
EXTERNAL DIMENSIONS	1250 x 140 x 480 mm (L x W x H)			
TYPICAL WEIGHT	13.6kgr.	12.9kgr.	13kgr.	13.7kgr.
GUARANTEE	2 years (1 year for the lamps)			

Thank you for your trust in our products
Olympia Electronics - European manufacturer

IN GENERAL

The device was created to exterminate all disturbing insects. The special fluorescent tubes (Black Light) attract insects from a long distance. For this reason it could be used in every place that many insects exist. They are attracted and pass through the interior metal net, they are exterminated by high voltage.

There is an exterior net in order to protect birds, animals or human beings that are close enough.

Without using any chemical material it offers a complete protection against many insects like mosquitos, flies, tinygnat etc. There is a special drawer at the bottom side of the device where all dead insects are collected. To remove the drawer unscrew the retaining screw.

WARNING!!!

Before removing the drawer follow carefully the below steps.

a. Remove the plug of the mains.

b. Unscrew the retaining screw of the drawer.

c. Remove the special drawer, clean the drawer and re-install it. Then screw again the retaining screw and reconnect the device on the mains.

In case of changing the lamps or the starter, follow carefully the below steps.

a. Remove the plug of the mains.

b. Unfasten the retaining screws and remove the protective exterior net.

c. Replace the tube or the starter which

is worn.

d. Reinstall the protective exterior net and fasten the removed screws.

e. Finish reconnecting the device on the mains and it is ready to operate.

ATTENTION!!! When the device is operating the protective exterior net must be installed.

Installation

Just plug the apparatus to the mains and it is ready for operation.

It is placed in a clear and visible place so as to attract insects easily.

It includes two hooks on top side for ceiling-mounting installation using a chain. The RT15 and RT-15/2 are suitable for hospitals, army camps, factories, etc.


The models RT-15/6 and RT-15/7 are special models with a mirror for wall-mounting installation. The connection is the same as previously. The installation is as follows.

First remove the screws 1A and 1B (Figure 1) which are found at the upper side-wise and replace them with the plastic holders. Afterwards install the apparatus on the wall. Finally place the plastic holders at point 2A and 2B (Figure 1) and fix it on the wall.

Description

1. Hole (for wall-mounted installation).
2. Hole (for wall-mounted installation).
3. Special drawer.
4. Installation point (for normal installation with chain).
5. Fuse holder.
6. Plug.
7. Protection grid.

Figure 1

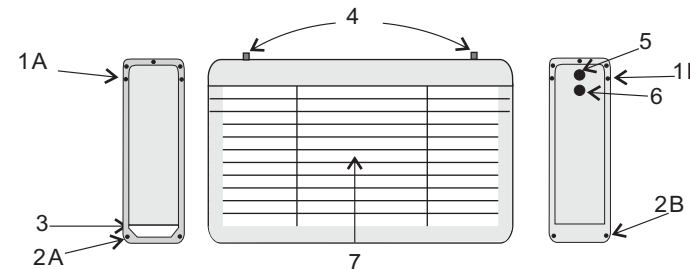

WARNING!!!

- The device is suitable for internal installation.
- The device must be kept away from children.
- The device must be not installed in areas with combustible gases or explosive dust.
- The device is not suitable for use in Sheds, cottages, stables and likewise places.
- If the device's cable is worn or damaged it must be replaced from OLYMPIA ELECTRONICS SERVICE department.

WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid. Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of deflection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini
P.C. 60300 P.O. Box 06 Eginio Pierias Greece
www.olympia-electronics.com
info@olympia-electronics.gr