

# Product data sheet

Specifications



## 3 Shutter control, Odace, mechanism with fixing frame, electronic, 6AX, IP21D, white

S520208

### Main

Range of product	Odace
Product or component type	Shutter control
Device presentation	Mechanism with fixing frame
Switch application	Roller blind
Switch additional information	Mechanical and electrical interlock between up/down
Type of packing	Paint cover

### Complementary

Device mounting	Flush
Technology type	Electronic
Number of rocker	3
Actuator	Rocker
Fixing mode	By screws
Colour tint	White (RAL 9003)
Surface finish	Glossy
Rated current	6 AX
[Ue] rated operational voltage	250 V
Network type	AC
Network frequency	50/60 Hz
Minimum load breaking capacity	200 operations 1.25 In and 1.1 Un
Number of terminals	3 screwless terminals
Shape of screw head	Pozidriv No 1
Clamping connection capacity	1 x 1.5...2 x 2.5 mm <sup>2</sup> for rigid cable(s) 1 x 1.5...2 x 2.5 mm <sup>2</sup> for flexible cable(s) 1 x 1.5...2 x 2.5 mm <sup>2</sup> for stranded cable(s)
Wire stripping length	12 mm
Material	Thermoplastic ABS-UV stabilised: centre plate PBT (polybutylene terephthalate) GF30: support frame PC (polycarbonate) GF10 FR: casing
Height	71 mm
Width	71 mm

Depth	43 mm
Embedding depth	31.2 mm
Net weight	0.048 kg
Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane

## Environment

Ambient air temperature for storage	-5...50 °C
Dielectric strength	2000 V
Ambient air temperature for operation	5...35 °C
Standards	2006/95/EEC EN 60669-1
IK degree of protection	IK04
IP degree of protection	IP21D

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.000 cm
Package 1 Width	7.500 cm
Package 1 Length	7.500 cm
Package 1 Weight	48.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	9.000 cm
Package 2 Width	37.000 cm
Package 2 Length	5.800 cm
Package 2 Weight	328.000 g
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Height	30 cm
Package 3 Width	40 cm
Package 3 Length	60 cm
Package 3 Weight	8.432 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>

---

<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>

---


## **Contractual warranty**

---

<b>Warranty</b>	18 months
-----------------	-----------

**Dimensions**

---

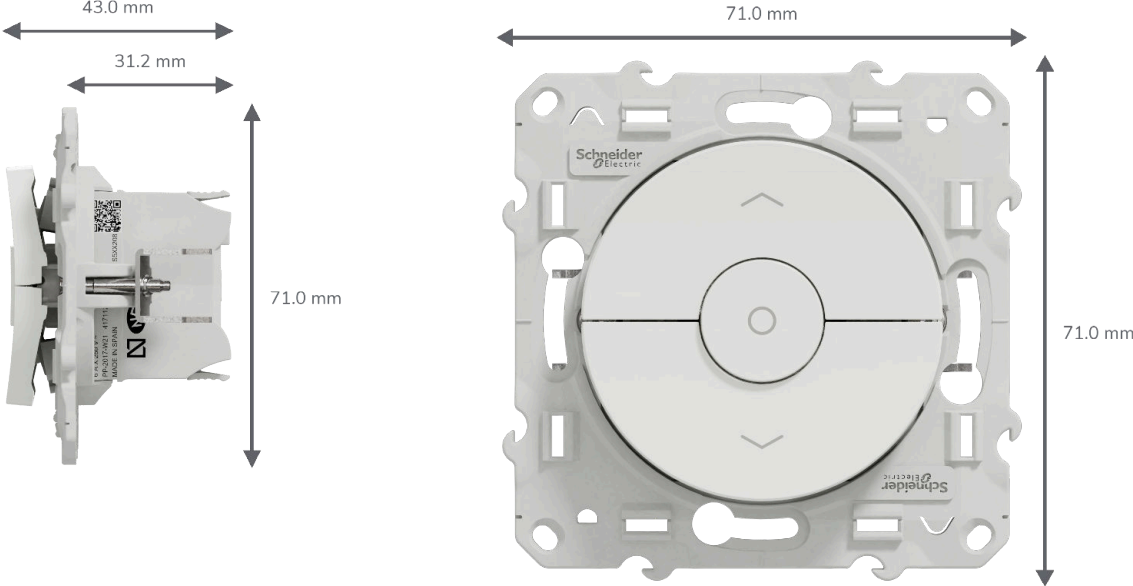

**Recommended replacement(s)**